

Coffman's extensive Specials Program has created a number of turnings and mouldings that are readily available in addition to our standard product offering. While not part of a standard Coffman family, these products are manufactured on a repetitive basis making them a timely and cost effective option. Call Coffman for a quote.

- Rails are available plowed 1-3/4" and 2-1/4".
- Shoe, Fillet are available.
- Fittings are available.



C-6600 Rail
3 1/2" W x 2" H



C-6310 Rail
3 1/2" W x 2 3/8" H



C-4122 Newel
3" x 57 1/2"



C-4122BT Newel
3" x 57 1/2"



C-4124 Newel
3" x 50"



C-4125BT Newel
3" x 57 1/2"



C-5011 Baluster
1 1/4" Sq. x 36", 41"



C-5041 Baluster
1 1/4" Sq. x 36", 41"



C-5341 Baluster Eased Edge
1 5/8" Sq. x 36", 42"



C-5120 Baluster
1 1/8" Dia. x 34", 36", 39", 41"



C-5220 Baluster
1 9/16" Dia. x 34", 36", 39", 41"



C-5215 Baluster
1 3/4" Sq. x 34", 36", 39", 41"



C-4640 Newel
4 1/2" x 48"



C-4645 Newel
4 1/2" x 60"



C-4610 Newel
4 1/2" x 41"



C-4612 Newel
4 1/2" x 43 1/2"



C-4615 Newel
4 1/2" x 60"



C-5612 Baluster
2 1/4" Sq. x 31", 34", 36", 39", 41"




C-5602 Baluster
2 1/4" Sq. x 31", 34", 36", 39", 41"

Check local building codes.

44" BALUSTERS Available in ALL Coffman Square Bottom Profiles

- 44" overall length with no pin.
- Turning will match the 36" baluster of that profile with the additional length added to the bottom block.
- Bottom of baluster will have a 1/4" x 4" hole predrilled for use with provided wooden dowel pin or optional C-3203 Baluster Fastener.

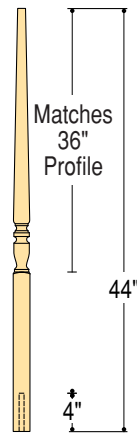

44" Balusters are used under Turnouts (34"+ Rake Rail Heights), under Volutes (35"+ Rake Rail Heights), and on stairs with higher rake rail heights.



44" Balusters are also used in systems where a rake orientation is preferred with the baluster squares.